

DC BRUSHLESS FAN




CC-7015 SERIES

FEATURES

SIZE:	70x70x15 mm
BEARING TYPE:	BALL , SLEEVE & ONE BALL & ONE SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
WEIGHT:	46(g)

PERFORMANCE & DIMENSIONS

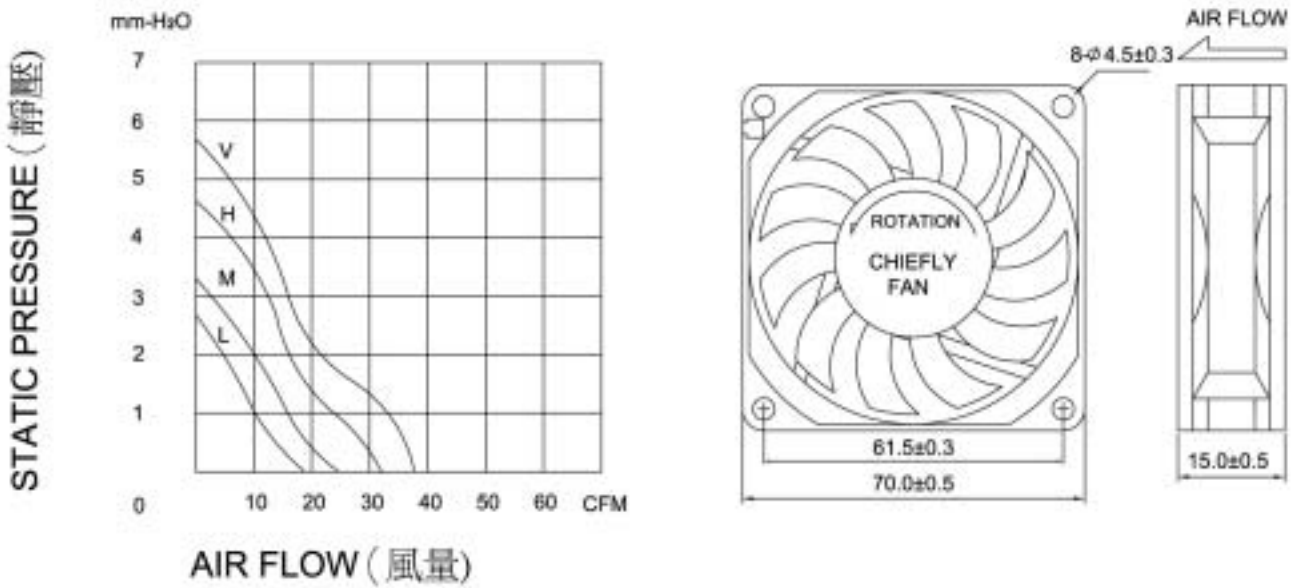

Model No.	Bearing	Rated Voltage (VDC)	Air Flow (CFM)	Current (A)	Input Power (Watts)	Speed (RPM)	Noise Level (dBA)	Dimensions	
								LxWxH (mm)	
CC 7015S12H	Sleeve	12	39.06	0.50	6.00	4400	35.2	70x70x15	
CC 7015B12H	2Ball	12	39.06	0.50	6.00	4400	35.2		
CC 7015C12H	1B1S	12	39.06	0.50	6.00	4400	35.2		
CC 7015S24H	Sleeve	24	39.06	0.30	7.20	4400	35.2		
CC 7015B24H	2Ball	24	39.06	0.30	7.20	4400	35.2		
CC 7015C24H	1B1S	24	39.06	0.30	7.20	4400	35.2		
CC 7015S12M	Sleeve	12	33.73	0.40	4.80	3800	32.3		
CC 7015B12M	2Ball	12	33.73	0.40	4.80	3800	32.3		
CC 7015C12M	1B1S	12	33.73	0.40	4.80	3800	32.3		
CC 7015S24M	Sleeve	24	33.73	0.20	4.80	3800	32.3		
CC 7015B24M	2Ball	24	33.73	0.20	4.80	3800	32.3		
CC 7015C24M	1B1S	24	33.73	0.20	4.80	3800	32.3		
CC 7015S12L	Sleeve	12	28.39	0.25	3.00	3200	28.5		
CC 7015B12L	2Ball	12	28.39	0.25	3.00	3200	28.5		
CC 7015C12L	1B1S	12	28.39	0.25	3.00	3200	28.5		
CC 7015S24L	Sleeve	24	28.39	0.15	3.60	3200	28.5		
CC 7015B24L	2Ball	24	28.39	0.15	3.60	3200	28.5		
CC 7015C24L	1B1S	24	28.39	0.15	3.60	3200	28.5		