


# DC BRUSHLESS FAN

## CC6020 SERIES



**SIZE:** 60x60x20 mm  
**BEARING TYPE:** BALL , SLEEVE & ONE BALL & ONE SLEEVE BEARING  
**IMPELLER:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0  
**FRAME:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0  
**WEIGHT:** 50(g)

### PERFORMANCE & DIMENSIONS

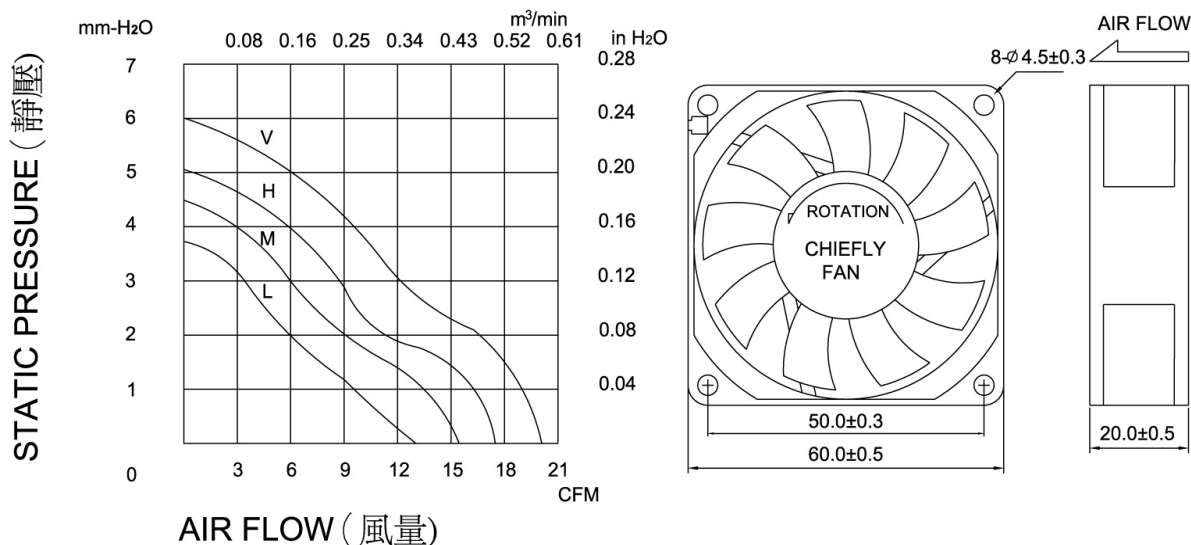

Model No.	Bearing	Rated Voltage (VAC)	Air Flow (CFM)	Current (A)	Input Power (Watts)	Speed (RPM)	Noise Level (dBA)	Dimensions	
								LxWxH (mm)	
CC 6020S12V	Sleeve	12	23.57	0.24	2.88	5000	34.90	60x60x20	
CC 6020B12V	2Ball	12	23.57	0.24	2.88	5000	34.90		
CC 6020C12V	1B1S	12	23.57	0.24	2.88	5000	34.90		
CC 6020S5H	Sleeve	5	18.36	0.30	1.50	4100	29.70		
CC 6020B5H	2Ball	5	18.36	0.30	1.50	4100	29.70		
CC 6020C5H	1B1S	5	18.36	0.30	1.50	4100	29.70		
CC 6020S12H	Sleeve	12	18.36	0.16	1.92	4100	29.70		
CC 6020B12H	2Ball	12	18.36	0.16	1.92	4100	29.70		
CC 6020C12H	1B1S	12	18.36	0.16	1.92	4100	29.70		
CC 6020S24H	Sleeve	24	18.36	0.12	2.88	4100	29.70		
CC 6020B24H	2Ball	24	18.36	0.12	2.88	4100	29.70		
CC 6020C24H	1B1S	24	18.36	0.12	2.88	4100	29.70		
CC 6020S5M	Sleeve	5	15.32	0.24	1.20	3500	26.00		
CC 6020B5M	2Ball	5	15.32	0.24	1.20	3500	26.00		
CC 6020C5M	1B1S	5	15.32	0.24	1.20	3500	26.00		
CC 6020S12M	Sleeve	12	15.32	0.14	1.68	3500	26.00		
CC 6020B12M	2Ball	12	15.32	0.14	1.68	3500	26.00		
CC 6020C12M	1B1S	12	15.32	0.14	1.68	3500	26.00		
CC 6020S24M	Sleeve	24	15.32	0.10	2.40	3500	26.00		
CC 6020B24M	2Ball	24	15.32	0.10	2.40	3500	26.00		
CC 6020C24M	1B1S	24	15.32	0.10	2.40	3500	26.00		
CC 6020S5L	Sleeve	5	12.32	0.18	0.90	2900	23.40		
CC 6020B5L	2Ball	5	12.32	0.18	0.90	2900	23.40		
CC 6020C5L	1B1S	5	12.32	0.18	0.90	2900	23.40		
CC 6020S12L	Sleeve	12	12.32	0.12	1.44	2900	23.40		
CC 6020B12L	2Ball	12	12.32	0.12	1.44	2900	23.40		
CC 6020C12L	1B1S	12	12.32	0.12	1.44	2900	23.40		
CC 6020S24L	Sleeve	24	12.32	0.08	1.92	2900	23.40		
CC 6020B24L	2Ball	24	12.32	0.08	1.92	2900	23.40		
CC 6020C24L	1B1S	24	12.32	0.08	1.92	2900	23.40		