

DC BRUSHLESS FAN




CC6015 SERIES

FEATURES

SIZE:	60x60x15 mm
BEARING TYPE:	BALL , SLEEVE & ONE BALL & ONE SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
WEIGHT:	38(g)

PERFORMANCE & DIMENSIONS

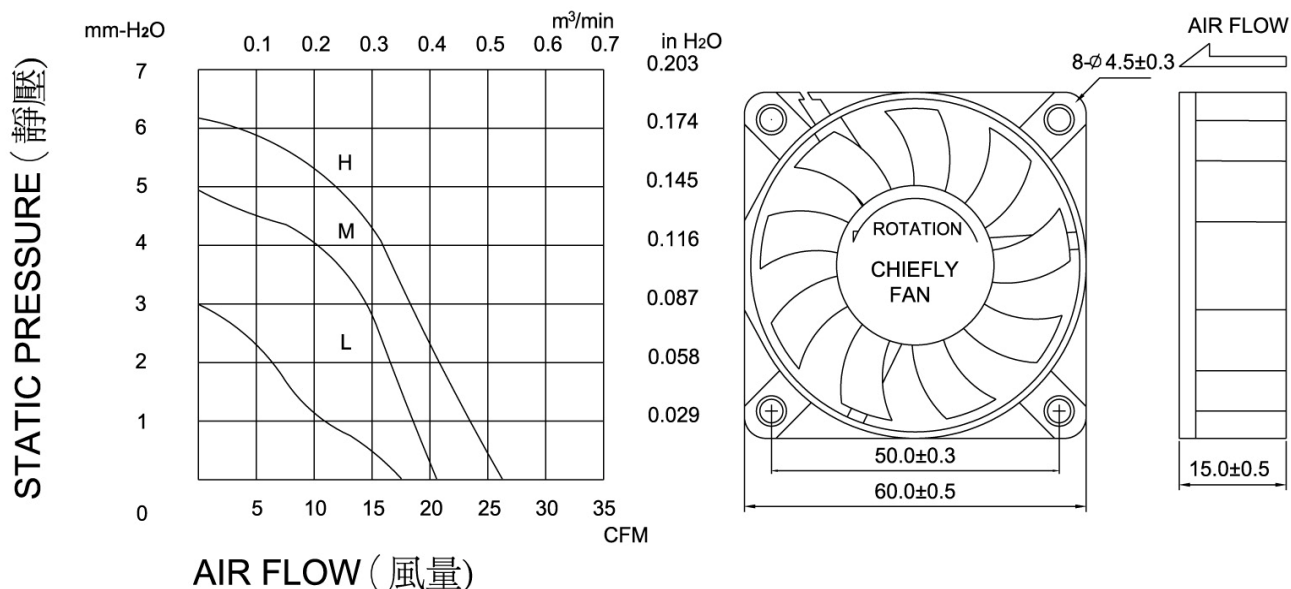

Model No.	Bearing	Rated Voltage (VAC)	Air Flow (CFM)	Current (A)	Input Power (Watts)	Speed (RPM)	Noise Level (dBA)	Dimensions	
								LxWxH (mm)	
CC 6015S5H	Sleeve	5	25.90	0.60	3.00	4600	36.00	60x60x15	
CC 6015B5H	2Ball	5	25.90	0.60	3.00	4600	36.00		
CC 6015C5H	1B1S	5	25.90	0.60	3.00	4600	36.00		
CC 6015S12H	Sleeve	12	25.90	0.16	3.60	4600	36.00		
CC 6015B12H	2Ball	12	25.90	0.16	3.60	4600	36.00		
CC 6015C12H	1B1S	12	25.90	0.16	3.60	4600	36.00		
CC 6015S24H	Sleeve	24	25.90	0.14	3.36	4600	36.00		
CC 6015B24H	2Ball	24	25.90	0.14	3.36	4600	36.00		
CC 6015C24H	1B1S	24	25.90	0.14	3.36	4600	36.00		
CC 6015S5M	Sleeve	5	21.39	0.45	2.25	3800	27.00		
CC 6015B5M	2Ball	5	21.39	0.45	2.25	3800	27.00		
CC 6015C5M	1B1S	5	21.39	0.45	2.25	3800	27.00		
CC 6015S12M	Sleeve	12	21.39	0.24	2.88	3800	27.00		
CC 6015B12M	2Ball	12	21.39	0.24	2.88	3800	27.00		
CC 6015C12M	1B1S	12	21.39	0.24	2.88	3800	27.00		
CC 6015S24M	Sleeve	24	21.39	0.12	2.88	3800	27.00		
CC 6015B24M	2Ball	24	21.39	0.12	2.88	3800	27.00		
CC 6015C24M	1B1S	24	21.39	0.12	2.88	3800	27.00		
CC 6015S5L	Sleeve	5	16.89	0.30	1.50	3000	24.00		
CC 6015B5L	2Ball	5	16.89	0.30	1.50	3000	24.00		
CC 6015C5L	1B1S	5	16.89	0.30	1.50	3000	24.00		
CC 6015S12L	Sleeve	12	16.89	0.18	2.16	3000	24.00		
CC 6015B12L	2Ball	12	16.89	0.18	2.16	3000	24.00		
CC 6015C12L	1B1S	12	16.89	0.18	2.16	3000	24.00		
CC 6015S24L	Sleeve	24	16.89	0.10	2.40	3000	24.00		
CC 6015B24L	2Ball	24	16.89	0.10	2.40	3000	24.00		
CC 6015C24L	1B1S	24	16.89	0.10	2.40	3000	24.00		