


DC BRUSHLESS FAN







CC-4028 SERIES

FEATURES

SIZE:	40×40×28 mm
BEARING TYPE:	BALL , SLEEVE & ONE BALL & ONE SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
WEIGHT:	30(g)

PERFORMANCE & DIMENSIONS

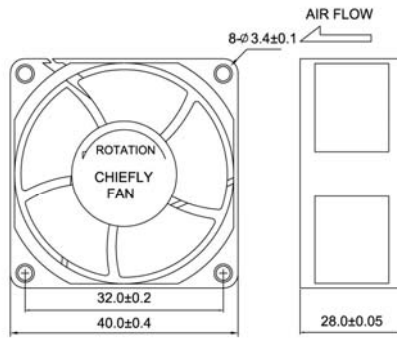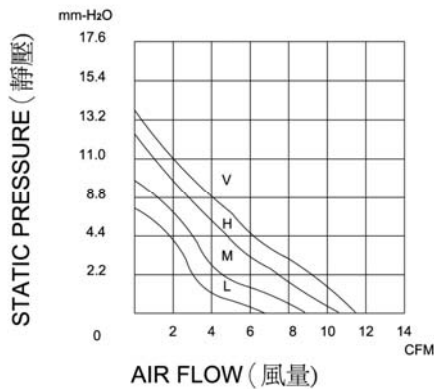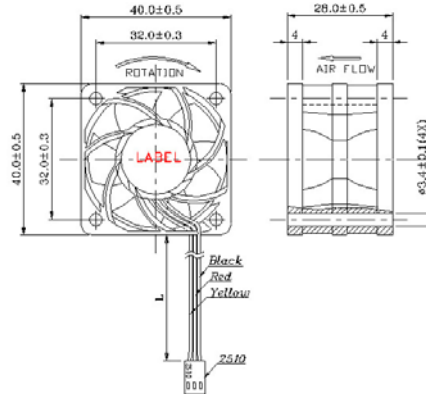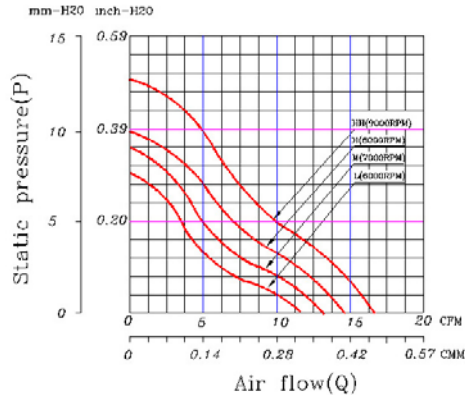

Model No.	Bearing	Rated Voltage (VDC)	Air Flow (CFM)	Current (A)	Input Power (Watts)	Speed (RPM)	Noise Level (dBA)	Dimensions L×W×H (mm)
CC 4028S5HH	Sleeve	5	12.03	0.33	1.65	6500	30.00	40×40×28
CC4028B5HH	2Ball	5	12.03	0.33	1.65	6500	30.00	
CC4028C5HH	1B1S	5	12.03	0.33	1.65	6500	30.00	
CC 4028S12HH	Sleeve	12	16.65	0.31	3.72	9000	41.00	
CC 4028B12HH	2Ball	12	16.65	0.31	3.72	9000	41.00	
CC 4028C12HH	1B1S	12	16.65	0.31	3.72	9000	41.00	
CC 4028S24HH	Sleeve	24	16.65	0.24	5.76	9000	41.00	
CC 4028B24HH	2Ball	24	16.65	0.24	5.76	9000	41.00	
CC 4028C24HH	1B1S	24	16.65	0.24	5.76	9000	41.00	
CC 4028S5H	Sleeve	5	10.16	0.25	1.25	5500	26.00	
CC 4028B5H	2Ball	5	10.16	0.25	1.25	5500	26.00	
CC 4028C5H	1B1S	5	10.16	0.25	1.25	5500	26.00	
CC 4028S12H	Sleeve	12	14.80	0.24	2.88	8000	36.00	
CC 4028B12H	2Ball	12	14.80	0.24	2.88	8000	36.00	
CC 4028C12H	1B1S	12	14.80	0.24	2.88	8000	36.00	
CC 4028S24H	Sleeve	24	14.80	0.16	3.84	8000	36.00	
CC 4028B24H	2Ball	24	14.80	0.16	3.84	8000	36.00	
CC 4028C24H	1B1S	24	14.80	0.16	3.84	8000	36.00	
CC 4028S5M	Sleeve	5	8.33	0.17	0.85	4500	22.00	
CC 4028B5M	2Ball	5	8.33	0.17	0.85	4500	22.00	
CC 4028C5M	1B1S	5	8.33	0.17	0.85	4500	22.00	
CC 4028S12M	Sleeve	12	12.95	0.19	2.28	7000	33.00	
CC 4028B12M	2Ball	12	12.95	0.19	2.28	7000	33.00	
CC 4028C12M	1B1S	12	12.95	0.19	2.28	7000	33.00	
CC 4028S24M	Sleeve	24	12.95	0.12	2.88	7000	33.00	
CC 4028B24M	2Ball	24	12.95	0.12	2.88	7000	33.00	
CC 4028C24M	1B1S	24	12.95	0.12	2.88	7000	33.00	

CC 4028S5L	Sleeve	5	6.46	0.11	0.55	3500	19.00
CC 4028B5L	2Ball	5	6.46	0.11	0.55	3500	19.00
CC 4028C5L	1B1S	5	6.46	0.11	0.55	3500	19.00
CC 4028S12L	Sleeve	12	11.10	0.14	1.68	6000	29.00
CC 4028B12L	2Ball	12	11.10	0.14	1.68	6000	29.00
CC 4028C12L	1B1S	12	11.10	0.14	1.68	6000	29.00
CC 4028S24L	Sleeve	24	11.10	0.10	2.40	6000	29.00
CC 4028B24L	2Ball	24	11.10	0.10	2.40	6000	29.00
CC 4028C24L	1B1S	24	11.10	0.10	2.40	6000	29.00

DC Series 39